

RF AMPLIFIER

Available as: QB-300-02, Outline Drawing with SMA Connectors (080-22517)

MODEL QB-300-02

Features

- High Gain: 24.5 dB Typical
- High Power: +22 dBm Typical
- Operating Temp. -54 °C to +71 °C
- Environmental Screening Available


Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -54 °C to +71 °C
Frequency	1 - 300 MHz	1 - 300 MHz
Gain (dB)	24.5 ± 1.0	—
Gain vs. Temperature	—	+0.5/ -0.6 Max.
Gain Flatness	1.0	—
Reverse Isolation (dB)	-36	—
VSWR In	1.5:1	—
VSWR Out	1.5:1	—
1 dB Compression (dBm)	+22	—
Output Intercept point		
3rd Order	+37	—
2nd Order	+52	—
Noise Figure (dB)	3.8	—
Power Vdc	+20	—
mA	154	—


Note: Specifications are guaranteed when tested in a 50 Ohm system. Specifications indicated as typical are not guaranteed.

Maximum Ratings

Ambient Operating Temperature -54°C to +71 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +24 Volts
 Continuous RF Input Power +13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

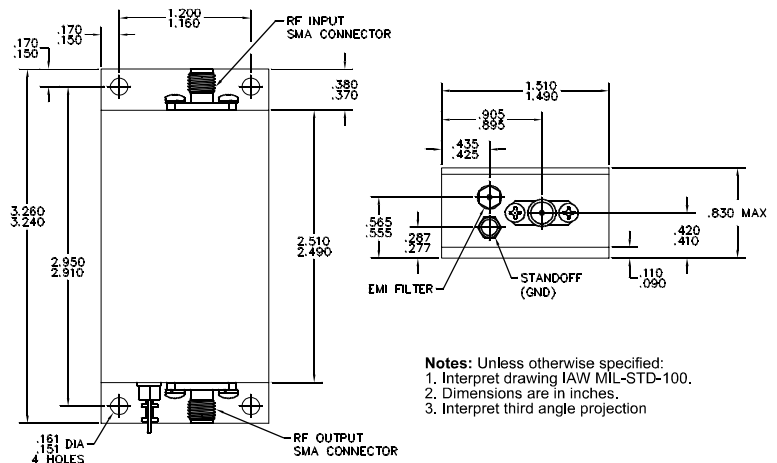

Typical Performance Data

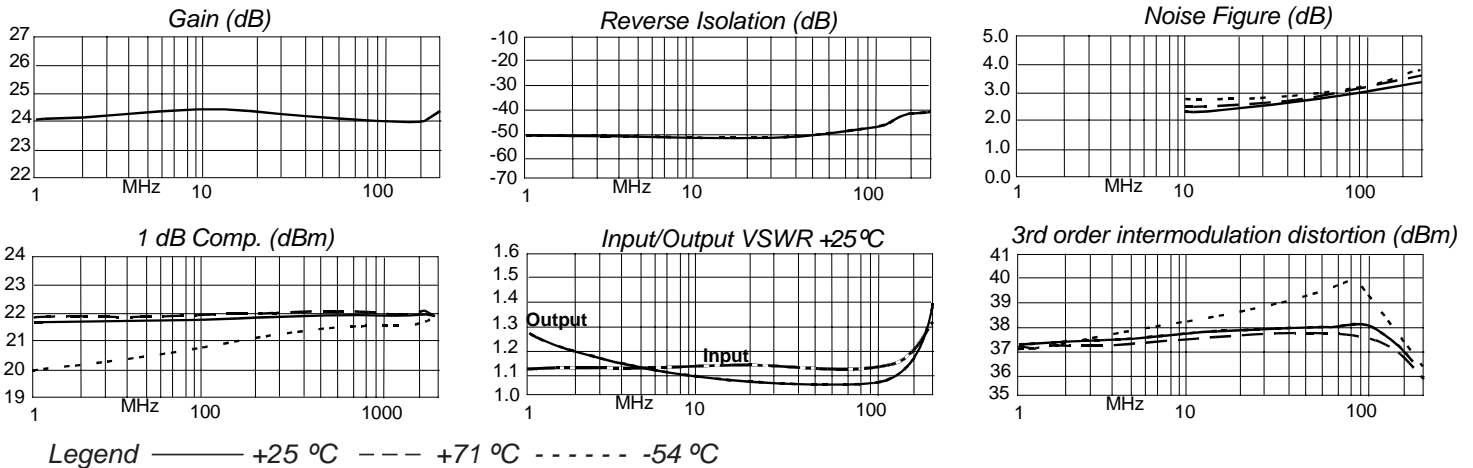

Linear S-Parameters Data

FREQ. MHz	-- S11--		-- S21--		-- S12--		-- S22--	
	dB	Ang	dB	Ang	dB	Ang	dB	Ang
1	-24.6	31.5	24.1	11.5	-51.0	170.0	-19.2	89.9
60	-24.8	-2.0	24.2	-57.2	-49.3	177.9	-29.6	-48.6
90	-25.0	0.6	24.2	-85.5	-47.4	142.9	-29.4	-70.8
120	-24.8	4.6	24.1	-113.8	-46.4	147.7	-28.6	-93.7
180	-22.5	5.1	24.1	-171.4	-43.2	105.0	-25.4	-144.6
210	-21.2	2.2	24.2	159.5	-43.1	72.5	-23.0	-168.9
240	-19.9	-2.0	21.2	129.8	-42.6	57.5	-20.4	171.8
270	-18.6	-7.0	24.3	99.2	-41.0	40.0	-17.8	155.1
300	-17.1	-15.6	24.3	67.9	-40.5	15.0	-15.3	138.1

